

Haara Floor Light

CAMERON DESIGN HOUSE

A branching floor light evolution of the award-winning Haara chandelier. The cylindrical lanterns are made from hand-drawn glass rods with brass caps to conceal the lighting element . Available in a variety of configurations and finishes. Bespoke options and design service available.

Light Source Glass diffusers. Integral LED lighting.
LED lights, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lux level available on request.

LED Driver Intergrated Triac Dimmable (5%-100%) as standard, 25w Max fixture wattage.
All dimming protocols available on request.
Wattage dependent on sizing.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.


Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Contact Cameron Design House for further information.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Contact CDH for further technical details/downloads:
technical@camerondesignhouse.com
camerondesignhouse.com


Haara Floor Light 3

H115.5xW40xD40cm
H45.5"xW15.7"xW15.7"

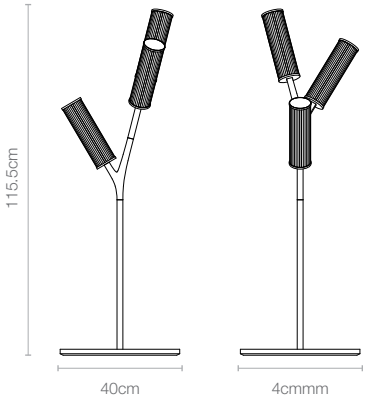

Haara Floor Light 5

H131.1xW61.3xD40cm
H51.6"xW24"xW15.7"

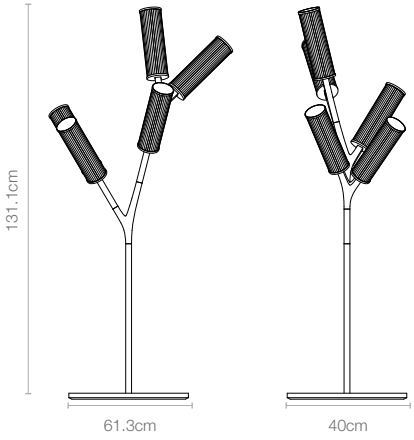

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

